

GENERAL NOTES:

THT-100TC = 1 DIRECTION ELECTRICALLY CONTROLLED.
 THT-100TC2 = 2 DIRECTIONS ELECTRICALLY CONTROLLED.
 THT-100MTC = MECHANICAL UNIT.

GALVANIZED STEEL CONSTRUCTION.

MINIMUM PAD SIZE SHOWN. MUST BE LEVEL WITHIN 1/4".

ALLOW 8" [203MM] FOR REMOVAL OF LIFT-OFF COVER.
 ALTERNATE COVERS AVAILABLE.

ELECTRICAL NOTES:

POWER SERVICE OPTIONS:

1. 24 VDC
2. 110 VAC SINGLE PHASE
3. 220 VAC SINGLE PHASE 50/60HZ
4. 220 VAC DUAL PHASE 50/60HZ


15A MAINS SERVICE REQ'D

4 LOCATIONS AVAILABLE FOR CONDUIT ACCESS.

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT
 FROM ACCESS CONTROL.

CODED NOTES:

1. BARRIER ASSEMBLY, WELDED - GALVANIZED STEEL
2. SHIELD ASSEMBLY, WELDED (2) - GALVANIZED STEEL
3. ROTOR ASSEMBLY, WELDED (6) - GALVANIZED STEEL
4. CEILING PLATE (2) - GALVANIZED STEEL
5. MECHANISM CHANNEL - ALUMINUM (N.S.C) OR STEEL (S.C.)
6. CHANNEL COVER - STAINLESS STEEL
7. BASE PLATE - ANODIZED ALUMINUM
8. BOTTOM BEARING
9. BOTTOM FLANGE
10. ANCHOR BOLTS (18), PROVIDED

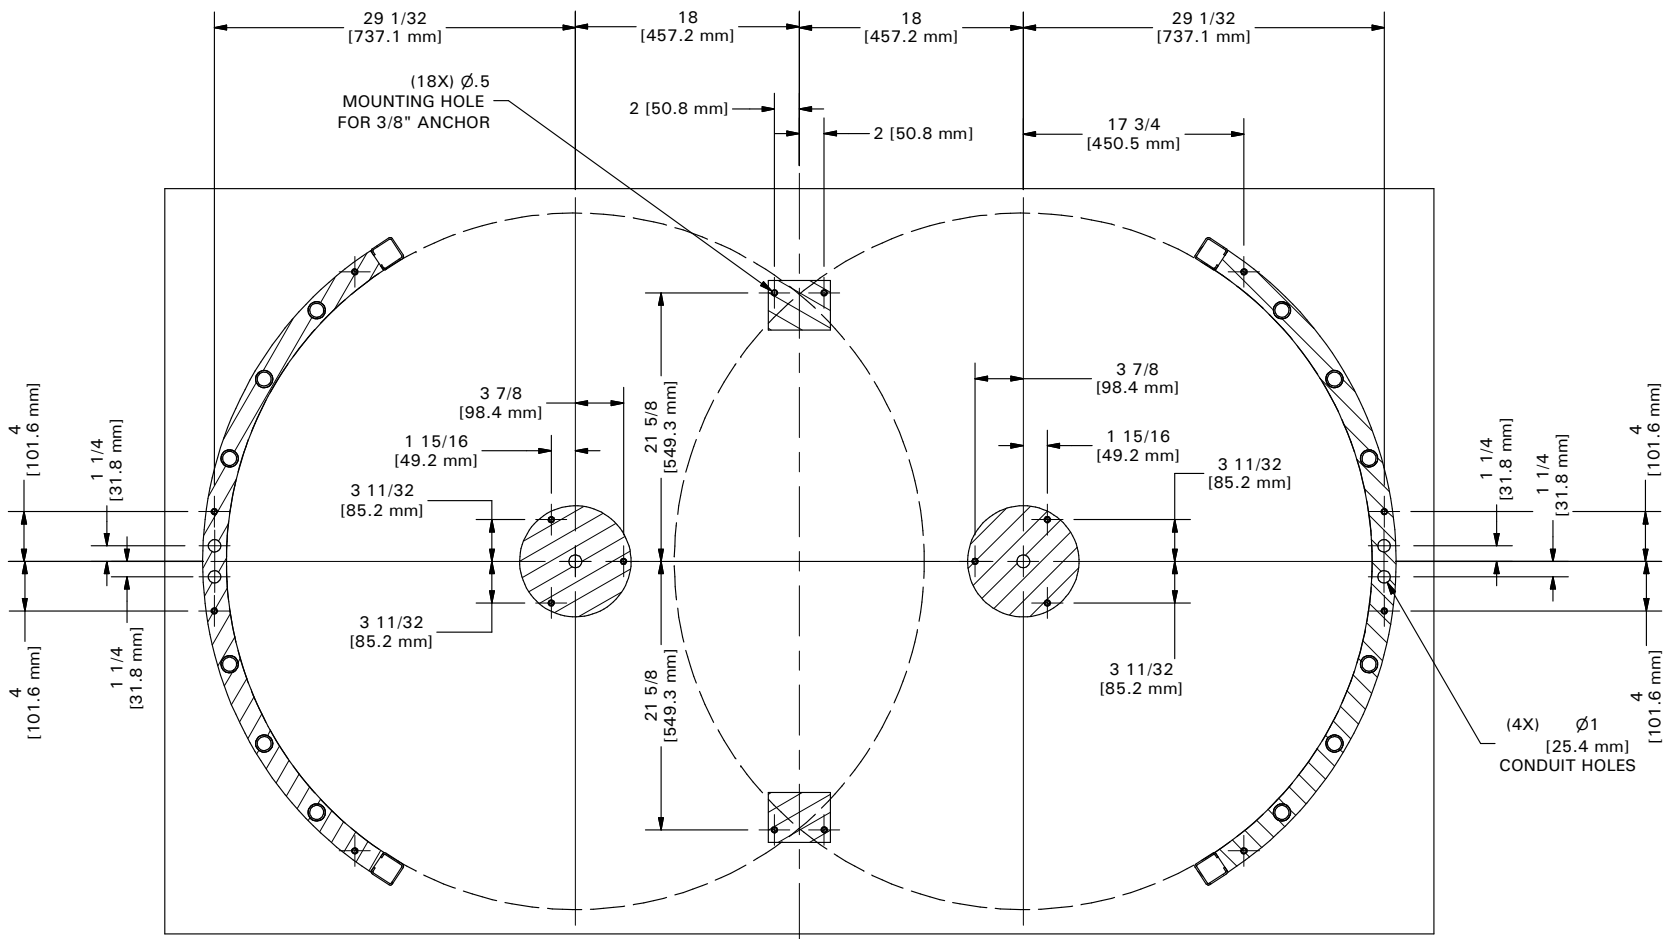

SECTION B-B
 SCALE 1:10

A
 B
 C
 D

6
 5
 4
 3
 2
 1